
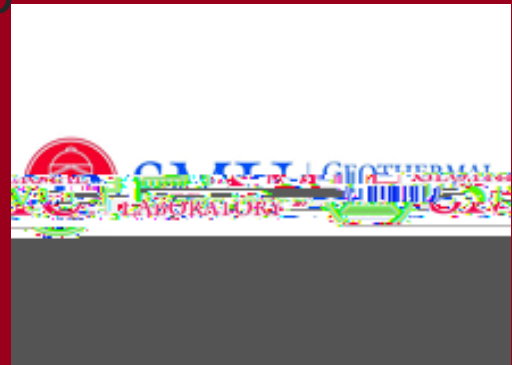


Enhanced Efficiency, Sustainable Power Generation, and CO2 Emission Reduction through Organic Rankine Cycle Technology

Simone Passera
Dallas, April 26th 2016



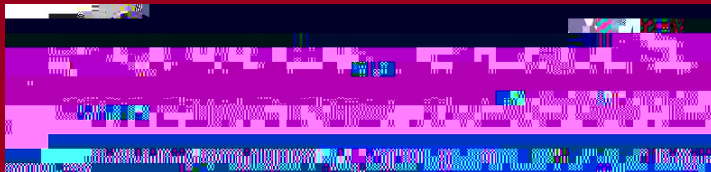



A PROVEN SOLUTION

- ‡ The design of the turbine (casing, blading) is carried out by Turboden representing the core know-how since its foundation in 1980
- ‡ 300 Turboden ORC turbines successfully implemented with sizes from 200 kW to 20 MW
- ‡ Proven experience with 10 different ORC fluids
- ‡ Axial geometry is a traditional configuration, the most widely adopted in turbomachinery design
- ‡ Axial is the reference design



1980

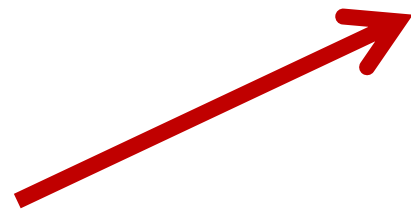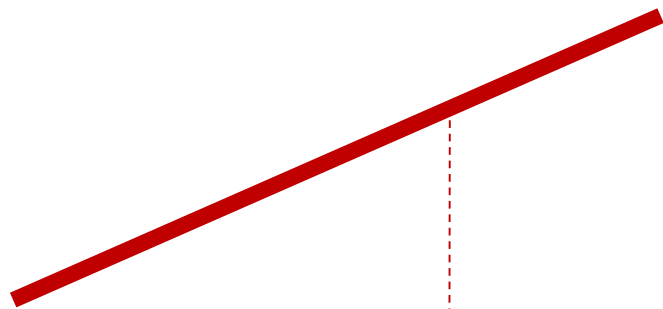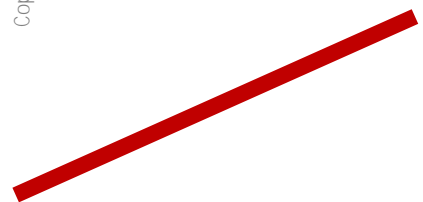



Reference project Intelligent use of aquifer gases

1. Hybrid geothermal/gas power plant for combined electric and heating generation (20 MWe with zero CO₂ emission)
2. Turboden ORC binary technology improves of around 30% the electrical efficiency of the power plant
3. Valia in fan nc n en i nal ce ie he mal a ife i h methane content)
4. Pilot project is the result of intensive researches combining different expertise and the best technologies from different fields





Layout example of Turboden reference



Reference Plant - Sauerlach

- Plant type: Two-level cycle geothermal unit
- Customer: SWM - StadtWerke München (public utilities company)
- Site: Sauerlach, Munich, Germany
- Start-up: December 2012
- Heat source: geothermal fluid at 140 °C
- Cooling device: air condensers
- Total power: 5+ MW_e plus 4 MW_{th} (13.6 MMBtu/h) decoupling for district heating
- Working fluid: refrigerant 245 fa (non flammable)

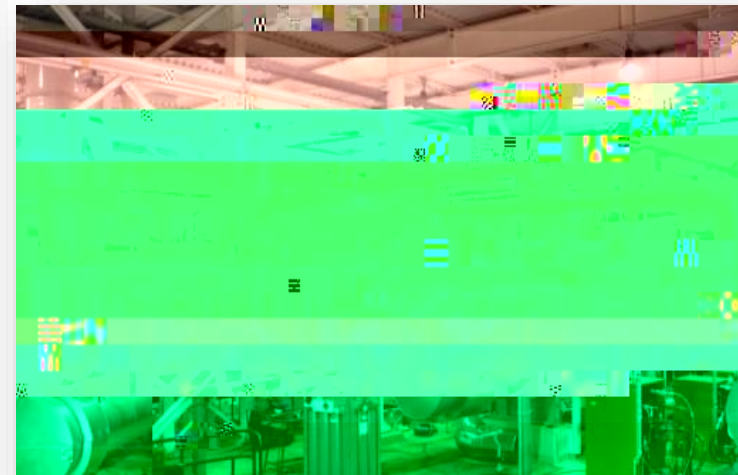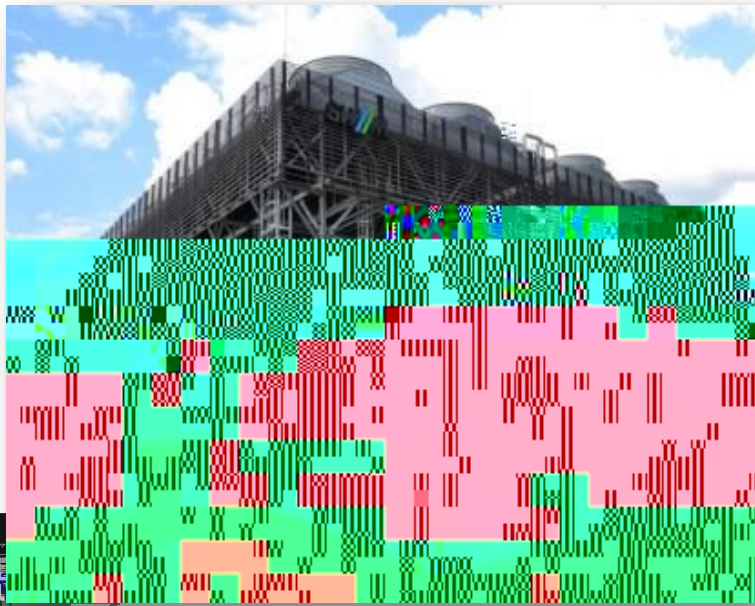

Custommade solution according customer requests

Oil&Gas applications

2. Gas turbines exhaust gas

Turboden References

‡TransGast Canada
GT power: 3.5 MWe
ORC power: **1 MWe**



Oil&Gas applications

3. Associated Petroleum Gas (APG) exploitation


APG produced in oil extraction fields is often flared to the atmosphere because its economic valorization as hydrocarbon is unfeasible


Main reasons:

Cycling availability, low calorific value, variable composition, high sulfur content, etc.


Difficult employment in high conversion efficiency power systems (e.g. gas turbines and reciprocating engines).

TurbodenORC characteristics (such

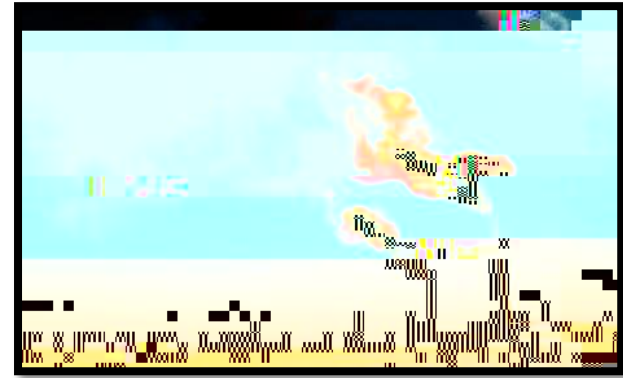

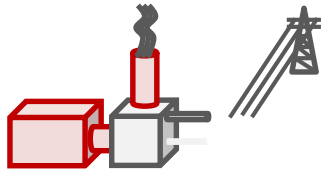

Thanks for your attention

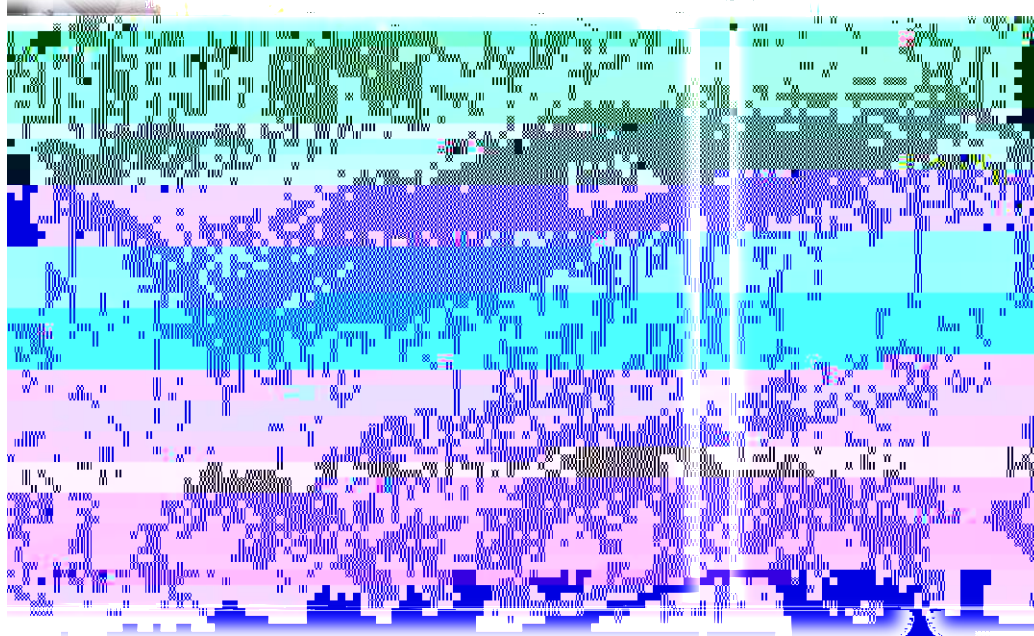

Turboden HQ at a glance, Brescia, Italy

Visit us at:

Turboden website: www.turboden.eu

Official YouTube Channel: <https://www.youtube.com/user/TurbodenItaly>



Simone Passera

simone.passera@turboden.it